


TRANSPORT REFRIGERATION EVAPORATOR

- Automatic & Manual Hot Gas Defrosting System
- Electronic Digital Controller
- Aluminum Body
- ABS Acrylic Cover



TRE-4000 • 12V • +0°C • P.N. 3730-840
TRE-4001 • 24V • +0°C • P.N. 3730-841
TRE-4002 • 12V • -20°C • P.N. 3730-842
TRE-4003 • 24V • -20°C • P.N. 3730-843

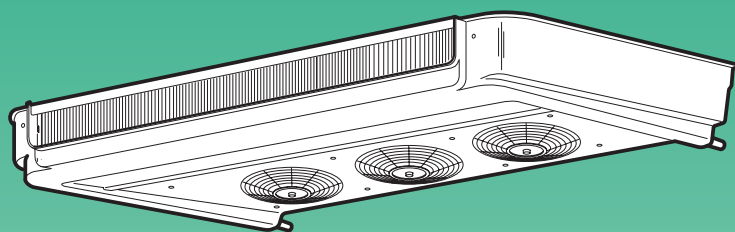

ALEX ORIGINAL

A LEADING AUTOMOTIVE A/C MANUFACTURER

SINCE 1969

TRE-4000, 4001, 4002, 4003

NOMINAL TECHNICAL DATA:

Refrigeration Capacity (at Ambient Temperature 30°C, R 404 A) :


2400 RPM : 0°C : 4650W / -10°C : 3400W / -20°C : 2050W

1000 RPM : 0°C : 3850W / -10°C : 2600W / -20°C : 1450W

Power Consumption : 18A - 12V / 9A - 24V

Airflow : 2340 m³/h

Weight : 19.5 Kg

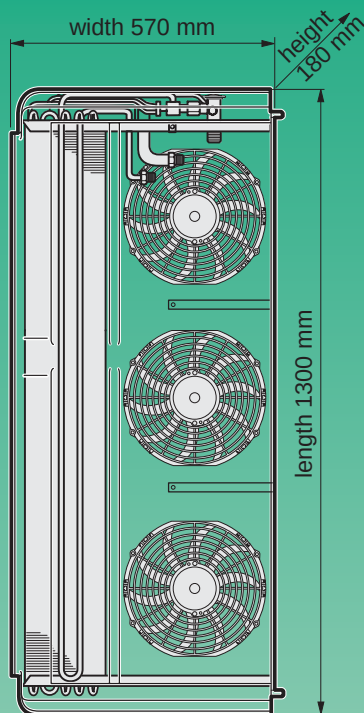

Alex Original reserves the right to change or alter the design of its products without any prior notice.






ALEX ORIGINAL LTD. Engineering Co.

16, Hamelacha St., Kiryat Sapir (New Industrial Area),
P. O. Box 8521 Netanya 42504, ISRAEL
Tel: 972-9-8855441 Fax: 972-9-8855442
<http://www.alex-original.com> E-mail: info@alex-original.com




TRE-4000
TRANSPORT REFRIGERATION EVAPORATOR
12 VOLT
OPERATING TEMPERATURE: +0°C
P.N. 3730-840

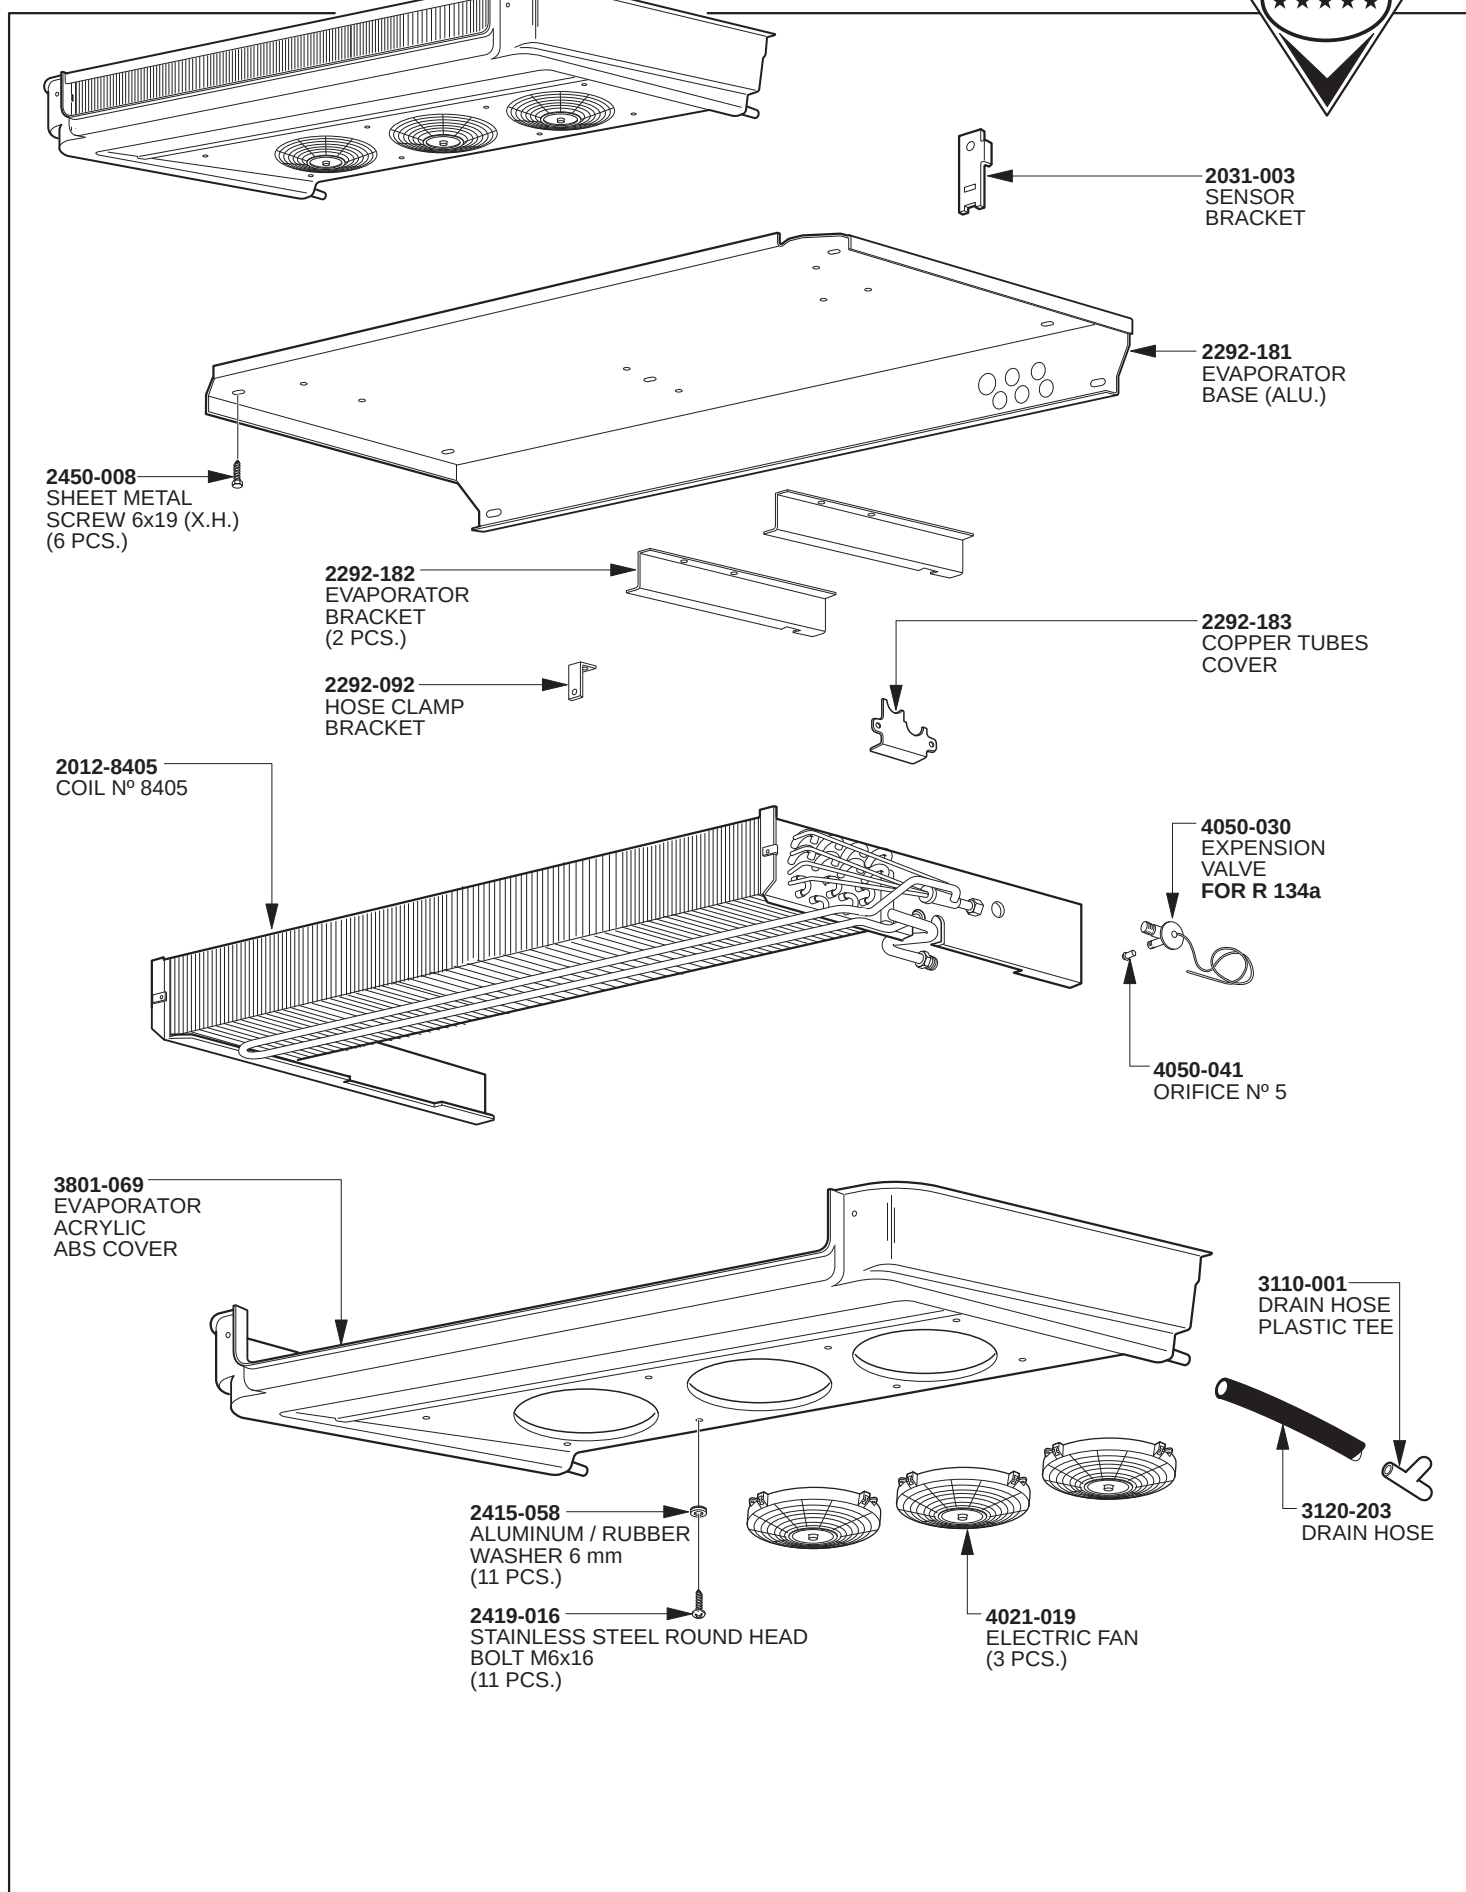





2292-203
CONTROLLER BRACKET



2292-202
CONTROLLER COVER



4285-094
WIRE HARNESS



2292-201
CONTROLLER BASE




1050-332
ELECTRONIC
CONTROLLER

NOTE:

- CONTROLLER BRACKET CAN BE MOUNTED ON TOP OR ON BOTTOM OF BASE.
- CONTROLLER & SWITCH CAN BE MOUNTED IN DASHBOARD WITHOUT USING THE BASE, COVER & BRACKET.



DIMENSIONS OF EVAPORATOR'S COVER

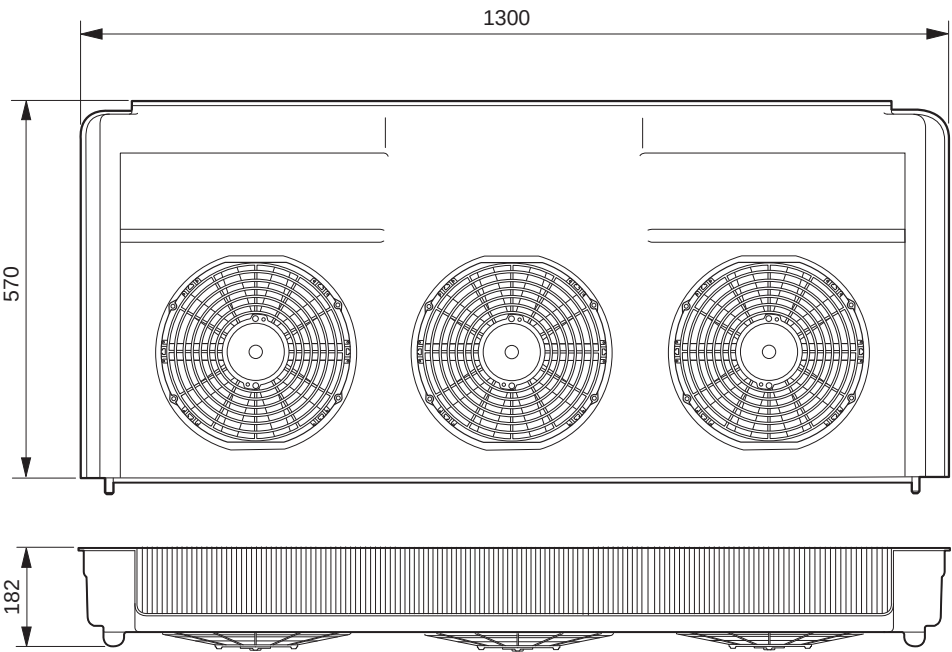

DIMENSIONS OF EVAPORATOR WITHOUT COVER

